

Product Features

FDWPW-25-LED-5K-120V-P



50w/70w HID/HPS REPLACEMENT




Dimensions: 210X140X90mm Packing Dimensions:230X150X100mm

LED Small Wall Pack, 25 watts, 120M Complete with Photo-Cell

The LED wallpack light offer maximum light output for general purpose area and security lighting. They eficiently deliver lumens, and consume less energy than traditional wallpack MH technologies. This versatile luminaire is ideal for replacing existing MH ixtures.

- Product Applications
- Applications: Security, pathway and perimeter lighting, Building entryways and walkways.
- Structure Features
- Shell materials: Aluminum & PC.
- Finish: Dark Bronze/Black
- Net Weight: 0.9kgs Unit: mm

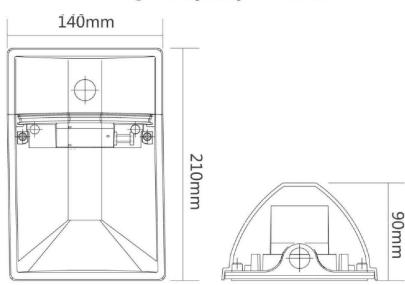

Туре			
Power	25w	Lighting Angle	
Input Voltage	AC100-277V	LED Brightness Decay	<5%/6000hrs
PF	>0.95	Working Life	>50000hrs
Driver Efficiency	>90%	Working Temperature	-20-+40°C
Luminous Flux	3069 lms	Storage Temperature	-40-+80°C
Color Temperature	5000K	Protection Level	Wet Location/IP65
CRI	Ra>80	Cable	
Proterction	IP65	G.W./N.W.	1.0KG/0.9KG
Size	210X140X90mm	Packing size	230X150X100mm