




Features



- * Ideal for sloped ceilings, wall washing, highlighting artwork, task or general lighting
- * Type IC, Air-Tight & Damp - No Housing Required
- * Driver Inside Connection Box - No Junction Box Needed
- * Rated for long life - over 50,000 hours



DIMENSION

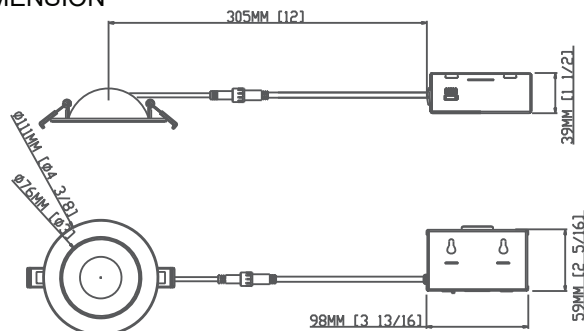

INSTALLATION



Cut Hole Size
Ø3-1/2" (90mm)



SPECIFICATIONS		
Model	FDFG-3-8W-5CCT-WH	FDFG-3-8W-5CCT-BK
Watts	8W	
CRI	90Ra+	
Color Temperature(K)	Pre-Select 5CCT - 2700K, 3000K, 3500K, 4000K, 5000K	
Light Output(lm)	700lm	
Default Driver Input	AC120V, 60Hz	
Dimming	Triac Dimmers 10% - 100%	
Power Factor	>0.9	
Approved Location	Insulated Ceiling & Damp Location	
Air Tight	Yes	
Operating Temp	(-4°F~104°F) -20~40°C	
Beam Angle	38°	

PACKAGE

Weight(g)	400g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	375*325*325mm
Gross Weight	8.7kg/CTN

INCLUDED IN BOX

- 3" LED Floating Gimbal with Remote Driver

OPTIONAL ACCESSORIES

Mounting Plates



3 7/8" x 6" new construction pre-mounting plate opening Ø3 7/8" (98mm), Ø4 3/8" (113mm), Ø6 1/4" (160mm)

Flexible Connector



4ft/ 6ft/ 10ft/ 20ft
Flexible Cable

Emergency Backup



15W Emergency Driver
AC100-347 VAC 50/60Hz,
emergency time 90mins,
Battery Li-Ion battery,
14.8V/2000mAh