



Description


4" LED Floating Gimbal
Adjustable in any direction and easy to use

Features

- * Ideal for slopped ceilings, wall washing, highlighting artwork, task or general lighting.
- * Type IC, Air-Tight - No Housing Required
- * Driver Inside Connection Box - No Junction Box Needed
- * Pre-Select 5 CCT - from 2700K, 3000K, 3500K, 4000K, 5000K
- * Rated for long life - 50,000 hours




DIMENSIONS

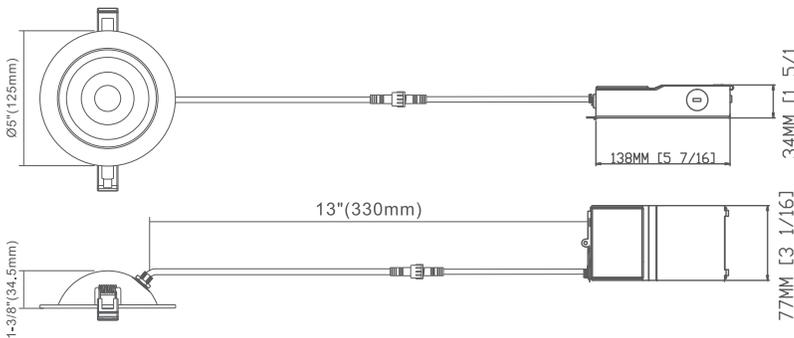

INSTALLATION

Cut Hole Size
Ø4-1/4" (108mm)

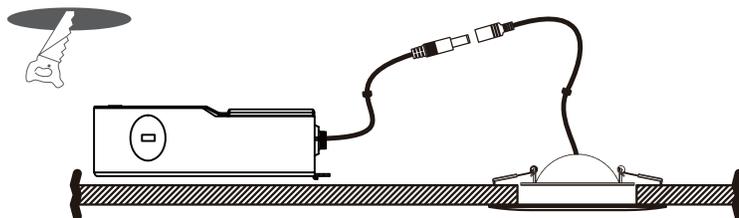

| SPECIFICATIONS | |
|-----------------------|---|
| Model | DFDG-4-9W-5CCT-WH/-BK/-BNG |
| Watts Lumens | 9W 700 lms (White) & 800 lms (Black/Brush Nickel) |
| CRI | 90Ra+ (White) 80Ra+ (Black/Brush Nickel) |
| Color Temperature(K) | Pre-Select 5CCT - 2700K, 3000K, 3500K, 4000K, 5000K |
| Default Driver Input | AC120V, 60Hz |
| Optional Driver Input | Triac Dimmers 10% - 100% |
| Power Factor | >0.9 |
| Approved Location | Insulated Ceiling & Damp Locations |
| Air Tight | Yes |
| Operating Temp. | (-4°F to +104°F) -20 to +40°C |
| Beam Angle | 38° |

| PACKAGE | |
|---------------|------------------|
| Weight.(g) | 500g |
| Qty/CTN (pcs) | 18pcs/CTN |
| Box Dimension | L420*W280*H265mm |
| Gross Weight | 10.5kg/CTN |

INCLUDED IN BOX

- 4" LED Floating Gimbal with Remote Driver



Color Choices



ACCESSORIES (Optional)

| Mounting Plates | |
|--------------------|--|
| | 13" Long Flat Plate opening Ø4-1/4" (108mm) |
| | 26-1/2" Long Flat Plate opening Ø4-1/4" (108mm) |
| | 16-1/2" Long Flat Plate opening Ø4-1/4" (108mm) |
| | 3"/4" x 6" new construction pre-mounting plate opening Ø3"(75mm), Ø4-3/8"(110mm), Ø6-1/4"(160mm) |
| Flexible Connector | |
| | 4ft/ 6ft/ 10ft/ 20ft Flexible Cable |
| Emergency Backup | |
| | 15W Emergency Driver AC100-347 VAC 50/60Hz, emergency time 90mins, Battery Li-Ion battery, 14.8V/2000mAh |