

## Type IC & Air-Tight



### DESCRIPTION

Recessed 4" Gimbal Round LED With Integral Driver In Connection Box  
Fits Where No Other Recessed Fixture Can

**Unique Design: Gimbal Yet Air-Tight Without Housing Needed**

### FEATURES & BENEFITS

**2" Thin** - Install Where Ceiling Space Is Limited

**Type IC Rated** - No Housing Required

**Fast & Easy To Install** - Save On Labour

**Driver Inside Connection Box** - No Junction Box Needed


**Directional Beam** - Great for Sloped Ceilings and Highlighting Artwork

**CRI 90** - True Colour Rendering

### MOUNTING

Cut Hole In Ceiling And Snap Fixture In Opening With Attached Spring Clips

Ceiling Clearance Required: 2 1/2"

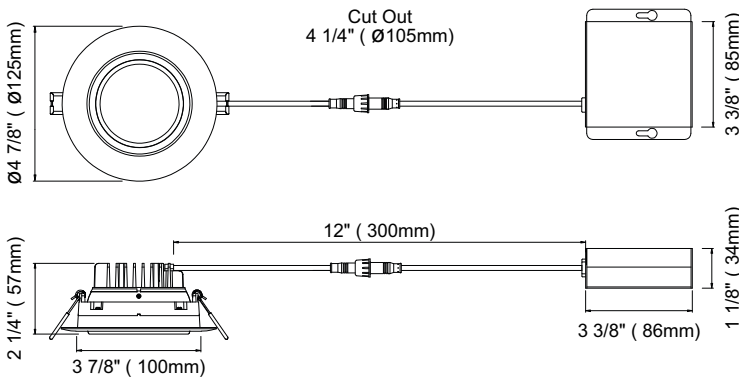

## FDLED-4" -GIMBAL

### 4" Gimbal Round Recessed LED 9W

SPECIFICATION	
Applications	Sloped Ceilings, Highlighting Artwork
Energy Used	9W 11W
Colour Temperature	3000°K
Light Output	3K 9W 650 - 11W 850
Halogen Equivalent	90 W
Beam Angle	40° Beam with 30° tilt and 360° rotation
CRI	80
Driver Input	120V AC or 277V
Power Factor	0.98
Dimming	TRIAC Dimmers 10% - 100%
Approved Location	Insulated Ceiling & Damp Locations
Air Tight	Yes
Ambient Temperature	-40°F (-40°C) to +104°F (+40°C)
Projected Life	70% Light Output at 50,000 Hours
Certification	cETLus, Energy Star
<b>Warranty</b>	<b>5 Years</b>

### Driver Included



### COMPLIANCE



### Available Trims:



White



Black



Brushed Nickel

CHARACTERISTICS

Unique Design: Gimbal with 30° tilt and 360° rotation, Yet Air-Tight Without Housing Needed

Body: Durable, Die Cast Aluminum Alloy for Optimal Heat Dissipation

Paint: Oil Based Spray Painted - Scratch Resistant And Smooth Finish

LED: Epistar COB Custom Packaged by Hongli Tronic with LM80. Guaranteed 98% Lumen Maintenance After 6,000 Hours

Strict Binning To Ensure Consistent Light Colour

Driver: 4th Generation

Connection Box: Saves Contractors Labour In Installation On Every Job

Testing: Every Single Driver Is Powered For Minimum 24 Hours Together With The Fixture That It Is Shipped With

Every LED Is Visually Checked Before And After The PCB Is Mounted On The Fixture. NO Random Tests-We Hand Test Every Fixture & Driver.

PHOTOMETRIC DATA

MODEL: FDLED4

VOLTAGE: 120 V

POWER: 11.2 W



PF: 0.985

LAMP FLUX: 1030 LM

LUMENS / POWER: 92 LM/W

CENTRAL INTENSITY: 1640 CD

BEAM ANGLE: 43 DEGREES

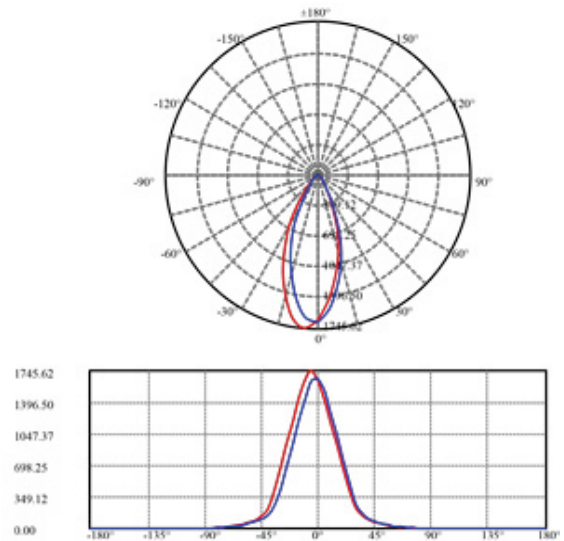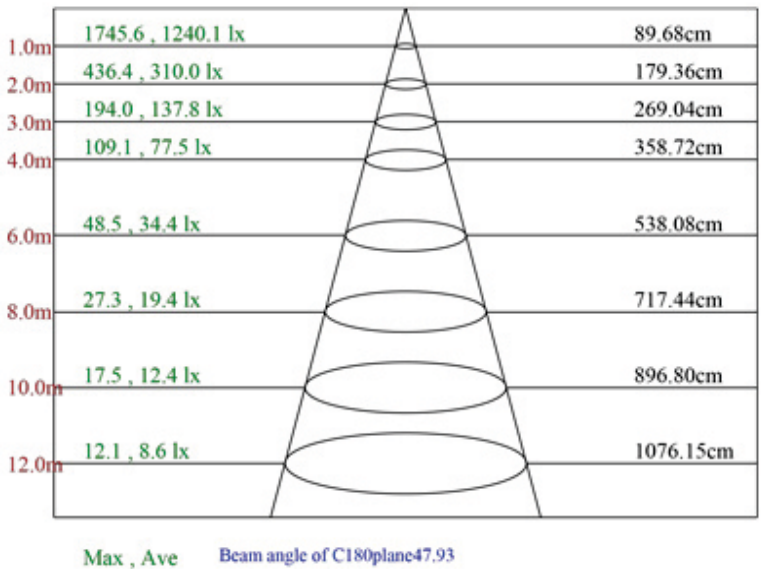

ORDERING GUIDE

FDLED-4-9W-3K -

FDLED-4-11W-3K -

FDLED-4-9W-4K -

FDLED-4-11W-4K -

Trim Finish

WH : White

BK : Black

BN : Brushed Nickel

Order 277V - 347V Optional Driver Separately



ACCESSORIES

Sold Separately



Low Volage Extension Cables  
**10FT FD-FLEX-10**  
**20FT FD-FLEX-20**



Rough-In Plates - **FD-MD-4**