




Features


- * 5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
- * Input Voltage 120V 60Hz
- * Construction: high quality aluminum and PC material, nice finish
- * 10%-100% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- * No traditional driver needed, suitable for virtually any application flickering free AC design
- * Recessed Housings or J-Box Installations



DIMENSION

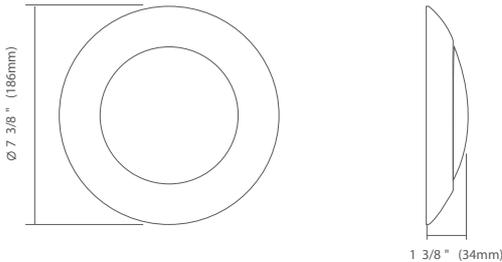

INSTALLATION

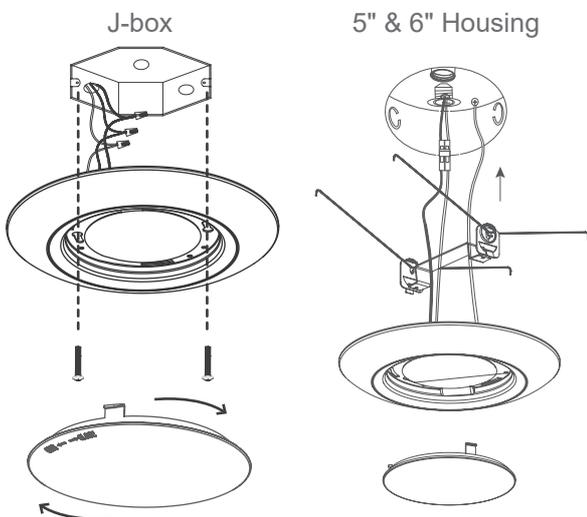

SPECIFICATIONS	
Model	FDDL-6-15W-5CCT-WH
Watts	15W
Light Output(lm)	900lm
Color Temperature(K)	Field selectable (2700K/3000K/3500K/4000K /5000K)
CRI	80Ra
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°

PACKAGE	
Weight.(g)	311g
Qty/CTN (pcs)	20pcs/CTN
Box Dimension	398*198*401 mm
Gross Weight	4.54kg/CTN

INCLUDED IN BOX

- 6" Disk Light
- 2 J-box Screws
- 3 Wire Nuts



ACCESSORIES

Mounting Brackets



E26 adapter and Mounting Brackets for 5" & 6" housing (sold separately)




Image for actual product installation

Emergency Driver

