

# 4" LED Fire Rated Recessed Downlight



**2-HOUR FIRE RATING**  
Tested to comply with UL 263,  
ASTM E119 & CAN ULC S101


## FEATURES

- 2-Hour Fire Rated, providing a reinforced and heat resistant steel casing
- Pre-Select 5 CCT: 27K-3K-35K-4K-5K
- Junction box with commercial grade driver included
- Triac Dimmable, Certified Airtight, IC rated
- Easy installation - NO ADDITIONAL BOX REQUIRED
- Long lifetime - 50,000 hours
- 5-year Warranty
- Tested to comply with UL 263, ASTM E119 & CAN ULC S101




**2-HOUR FIRE RATING**  
Tested to comply with UL 263,  
ASTM E119 & CAN ULC S101

## DIMENSION

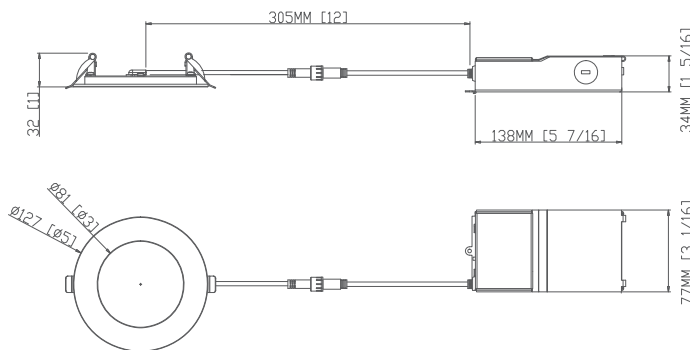

## INSTALLATION

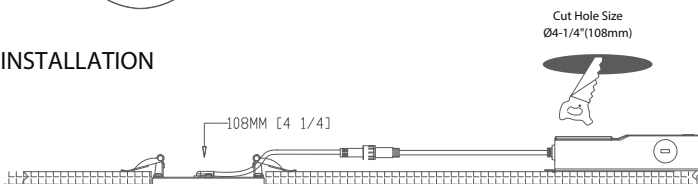

## Optional Accessories

### Extension Cables



10ft flexible connector,  
for use with Gimbal/  
slim LED fixtures



20ft flexible connector,  
for use with Gimbal/  
slim LED fixtures

### Mounting Plate



SKU#101007 is a 4" new construction  
pre-mounting plate  
Opening Ø4 1/4"(108mm)

### Goof Ring



4" Goof Ring  
Inside Diameter - 4 3/16" (106.8mm)  
Outside Diameter - 5 3/4" (146mm)  
Thickness - 1mm  
for use with Gimbal/ slim LED fixtures

### Decorative Trim Ring



4 inch Round