

Product Features

FDWPW-70-LED-5K-120-347V-D

The LED wallpack light offer maximum light output for general purpose area and security lighting. They efficiently deliver lumens, and consume less energy than traditional wallpack MH technologies. This versatile luminaire is ideal for replacing existing MH ixtures.




 Applications: Security, pathway and perimeter lighting, Building entryways and walkways.

- Structure Features
- Shell materials: Aluminum & PC.
- Finish: Dark Bronze/Black
- Net Weight:3.0kgs Unit: mm





Dimensions: 360X230X190mm Packing Dimensions:400X300X240mm

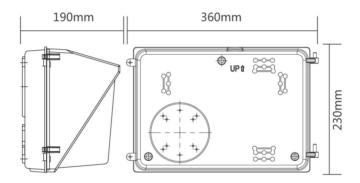

Туре			
Power	70w	Lighting Angle	
Input Voltage	AC120-347V	LED Brightness Decay	<5%/6000hrs
PF	>0.95	Working Life	>50000hrs
Driver Efficiency	>90%	Working Temperature	-20-+40°C
Luminous Flux	8,400lm	Storage Temperature	-40-+80°C
Color Temperature	5000K	Protection Level	Wet Location/IP65
CRI	Ra>80	Cable	
Proterction	IP65	G.W./N.W.	4.0KG/3.0KG
Size	360X230X190mm	Packing size	400X300X240mm