




## Features


- \* 5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
- \* Input Voltage 120V 60Hz
- \* Construction: high quality aluminum and PC material, nice finish
- \* 10%-100% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- \* No traditional driver needed, suitable for virtually and application flickering free AC design
- \* Recessed Housings or J-Box Installations



## DIMENSION

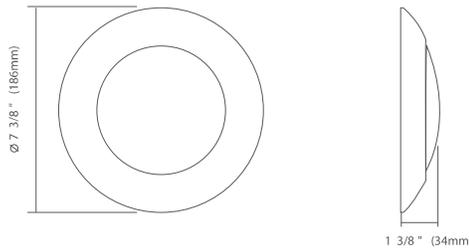

## INSTALLATION

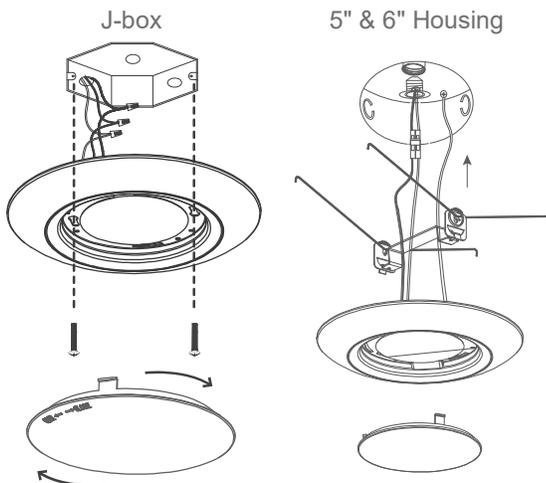

SPECIFICATIONS	
Model	FDDL-6-15W-5CCT-WH
Watts	15W
Light Output(lm)	900lm
Color Temperature(K)	Field selectable (2700K/3000K/3500K/4000K /5000K)
CRI	90Ra+
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~-104°F) -20~40°C
Beam Angle	120°

PACKAGE	
Weight(g)	311g
Qty/CTN (pcs)	20pcs/CTN
Box Dimension	398* 198 *401 mm
Gross Weight	4.54kg/CTN

## INCLUDED IN BOX

- 6" Disk Light
- 2 J-box Screws
- 3 Wire Nuts



## ACCESSORIES

### Mounting Brackets



E26 adapter and Mounting Brackets for 5" & 6" housing (sold separately)




Image for actual product installation

## Emergency Driver

