
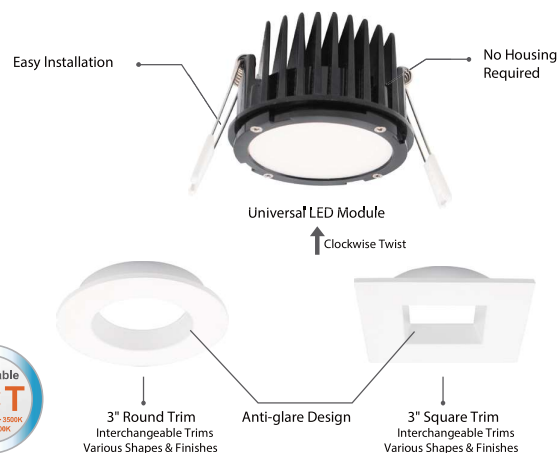


3" Regressed Module Downlight

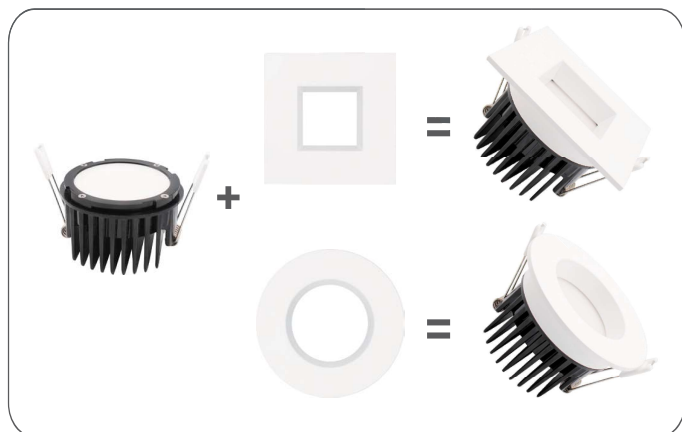

Trim Finish Options

- BLACK • WHITE

Description


3" Regressed Module Downlight

Features

- * Interchangeable Trims
- * Available shapes: Round and Square
- * Type IC, Air-Tight & Suitable for Wet Location - No Housing Required
- * Fast Installation & No Junction Box Needed
- * Includes two spring loaded clips to attach to any ceiling material.
- * 10%-100% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- * Rated for long life - over 50,000 hours




DIMENSIONS

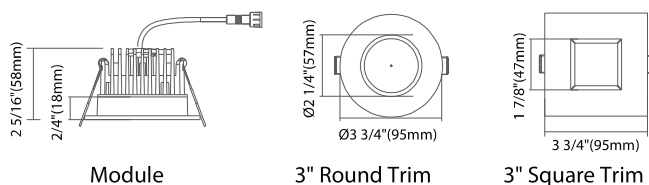

SPECIFICATIONS	
Model	FDRS-3-10W-5CCT-120V-R
Watts	10W
CRI	80Ra+
Color Temperature(K)	Pre-Select 5CCT 2700K/3000K/3500K/4000K/5000K
Light Output(lm)	650lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming 10-100%
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
IC Rated	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	90°

PACKAGE	
Weight.(g)	440g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	L345xW300xH305mm
Gross Weight	9.42kg/CTN

INSTALLATION

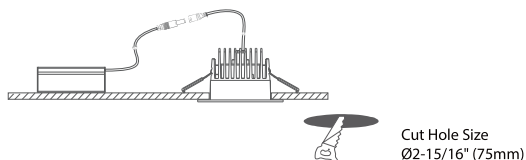

INCLUDED IN BOX

- 3" Regressed Module Downlight and Remote Driver



OPTIONAL ACCESSORIES



Mounting Plate



FD-UNMP (SKU#101078)

Universal Mounting Plate, compatible with 2", 3", 3.5", 4" Light Panel and Downlights

FD-MP-3-1 (SKU#101008)

Pre-Mounting Plate for 3" Gimbal and Slim LED Light Panel (78mm hole size)

Flexible Connector



10ft/ 20ft flexible connector

Emergency Power Pack



SKU#110502
AC120-347 VAC 50/60Hz, emergency time 90 mins