




Features


- * 5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
- * Input Voltage 120V 60Hz
- * Construction: high quality aluminum and PC material, nice finish
- * 10%-100% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- * No traditional driver needed, suitable for virtually and application flickering free AC design
- * Recessed Housings or J-Box Installations



DIMENSION

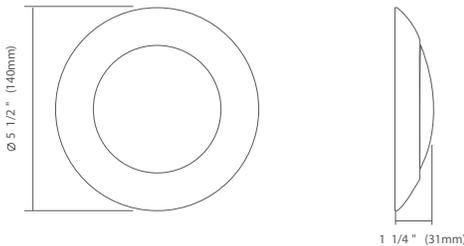

INSTALLATION

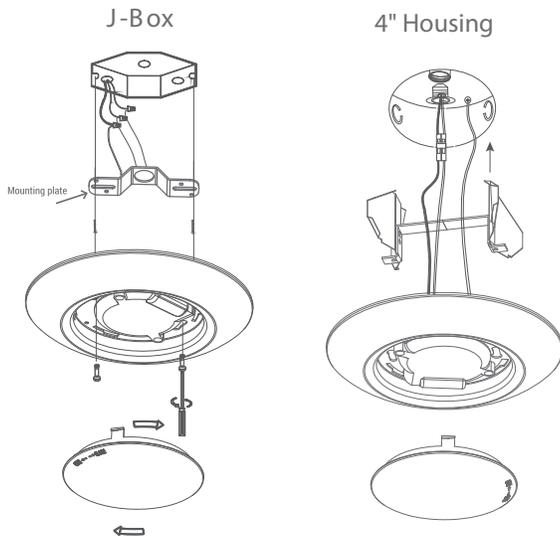

SPECIFICATIONS	
Model	FDDL-4-10W-5CCT-WH
Watts	10W
Light Output(lm)	600lm
Color Temperature(K)	Field selectable (2700K/3000K/3500K/4000K/5000K)
CRI	90Ra+
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°

PACKAGE	
Weight.(g)	277g
Qty/CTN (pcs)	20pcs/CTN
Box Dimension	342*220*347 mm
Gross Weight	3.9kg/CTN

INCLUDED IN BOX

- Mounting bracket to J-Box
- 4 J-box Screws
- 3 Wire Nuts



ACCESSORIES

Emergency Backup



15W Emergency Backup

Emergency Driver

