
## LED Running Man Exit Sign Round Heads with Battery backup Combo and Emergency Lighting



## LED Running Man Exit Sign is suitable for property management and institutional applications



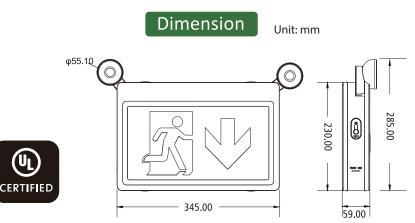

## Features and Specifications:

- > LED Ultra Bright Light Source
- ➤ 120-347V Dual Input
- Nickel Cadmium (NiCad) battery meets UL 120 minutes emergency lighting requirement
- > Test switch and AC-On indicator included Wall and ceiling mounting
- > Universal Mounting: Celling Mount; Wall Mount
- > Suitable for Damp Locations
- 2 Adjustable Heads
- 2 heads, 3 watts each head
- ➤ Emergency Duration ≥2 Hours

## Comes with three pictogram legends for direction selection.







Illuminance (at a distance) **Emergency Status** 3.281ft 64.22,110.8fc lm 691.2,11931x


HT Eavg/Emax ANGLE: 95.88 DEG

3.281ft 0.2888,0.7174fc lm 3.108,7.7221x

62ft 0.0722,0.1794fc 2m 0.7771,1.9311m

9.843ft 0.0321,0.0797fc 3m 0.3454,0.85801m

13.12ft 0.0180,0.0448fc



Illuminance (at a distance)


**Normal Status** 

7.272ft 221.64cm

14.54ft

29.09ft

26.26ft



Luminous Intensity Distribution Diagram **Emergency Status** AVERAGE BEAM ANGLE (50%): 24.6 DEG

Factory Direct Lighting (2020) Ltd. www.fdlighting.ca Tel: 1-855-533-0743 1-905-944-1210

100 Shields Court Unit B Markham, Ontario Canada, L3R 9T5